

Technical data sheet

Mesh cable tray GR-Magic® 35 A4


Item number: 6000091



Mesh cable tray with shaped connector of side height 35 mm.

No additional connection components are required for the mesh cable tray, it is simply interlocked. The grid width is 50 x 100 mm (exception: GRM 35/50 = 20 x 100 mm).

Magnetic shield insulation without cover 15 dB, with cover 25 dB.

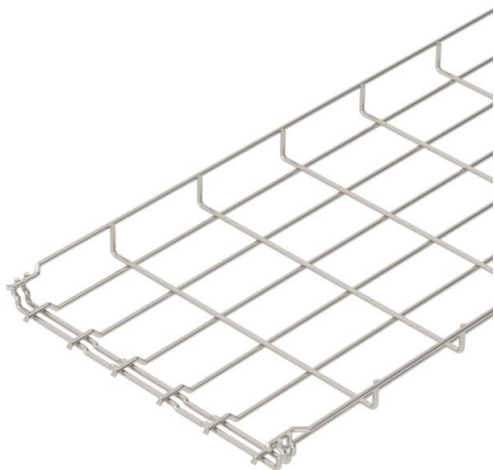

A4 Stainless steel

2B Bright, treated

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 6000091 |
| Type | GRM 35 300 A4 |
| Description 1 | Mesh cable tray GRM |
| Manufacturer | OBO |
| Dimension | 35x300x3000 |
| Colour | stainless steel |
| Material | Stainless steel 1.4401 |
| Surface | Bright, treated |
| Surface standard | |
| Smallest sales unit | 3 |
| Unit of quantity | Metre |
| Weight | 159 kg |
| Weight unit | kg/100 m |
| CO2 Footprint (GWP) Cradle-to-Gate | 7,9622 kg CO2e / 1 Meter |


Technical data sheet

Mesh cable tray GR-Magic® 35 A4

Item number: 6000091



Dimensions

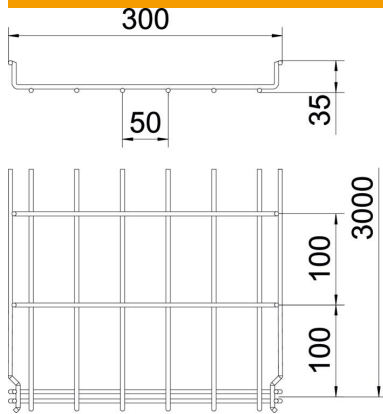

| | |
|-------------|----------|
| Length | 3,000 mm |
| Width | 300 mm |
| Width | 11.81 in |
| Height | 35 mm |
| Height | 1.38 in |
| Dimension B | 300 mm |

Technical data

| | |
|---|-----------------------|
| Connector version | Integrated connector |
| Mounting system fastening type | Floor Ceiling Wall |
| Maintain electrical functions | no |
| Integrated partition | Without |
| Usable cross-section | 71.3 cm ² |
| Usable cross-section | 10500 mm ² |
| Profile shape | U-shaped |
| Rustproof steel, pickled | yes |
| Screwless connector | yes |
| Wide-span version | no |
| Load test type according to IEC 61537 | Type II |
| Type of connector, cable support system | Click fastening |

Technical data sheet


Mesh cable tray GR-Magic® 35 A4

Item number: 6000091



Loads

| | |
|-----------------------------------|-----------|
| Insertable support spacings, min. | 1 m |
| Insertable support spacings, max. | 2 m |
| Support spacing 1.0 m | 0.75 kN/m |
| Support spacing 1.5 m | 0.22 kN/m |
| Support spacing 2.0 m | 0.15 kN/m |

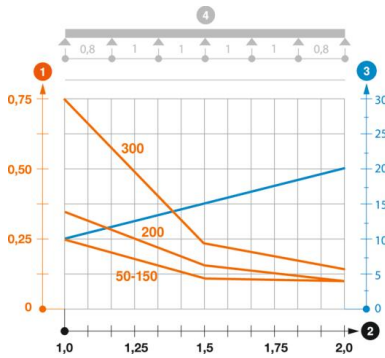

Load diagram, GR-Magic mesh cable tray, type GRM 35

- 1 Permitted cable tray/ladder load in kN/m without man load
- 2 Support width in m
- 3 Rail bend in mm at permitted kN/m
- 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width