

# Technical data sheet

## 90° bend 160 FT

Item number: 6229425



90° bend, horizontal, for all wide span cable ladders of 160 mm side height.  
For further stabilisation, additional supports should be planned for the area of the fittings.




|    |                    |
|----|--------------------|
| St | Steel              |
| FT | Hot-dip galvanised |

### Master data

|                     |                                |
|---------------------|--------------------------------|
| Item number         | 6229425                        |
| Description 1       | 90° bend                       |
| Description 2       | for wide span cable ladder 160 |
| Manufacturer        | OBO                            |
| Dimension           | 160x200                        |
| Colour              | zinc                           |
| Material            | Steel                          |
| Surface             | Hot-dip galvanised             |
| Surface standard    | DIN EN ISO 1461                |
| Smallest sales unit | 1                              |
| Unit of quantity    | Piece                          |
| Weight              | 1200 kg                        |
| Weight unit         | kg/100 pc.                     |

### Dimensions

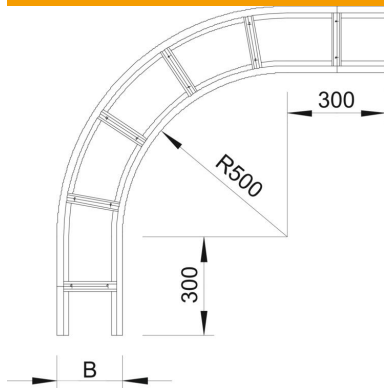

|             |        |
|-------------|--------|
| Width       | 200 mm |
| Height      | 160 mm |
| Dimension B | 200 mm |
| Dimension R | 200 mm |

# Technical data sheet

90° bend 160 FT

Item number: 6229425



## Technical data

|                               |                      |
|-------------------------------|----------------------|
| Bend (angle)                  | 90°                  |
| Version of the rungs          | Profile unperforated |
| Side rail version             | Flat profile         |
| Maintain electrical functions | no                   |
| Change of direction           | Horizontal           |
| Rustproof steel, pickled      | no                   |
| Side perforation              | no                   |
| Wide-span version             | yes                  |
| Rail thickness                | 2 mm                 |