

Technical data sheet

Surge arrester V10 3-pole + NPE with remote signalling
280 V
Item no. 5094931




Surge arrester, type 2+3

- Complete unit consisting of upper part and base, pre-mounted and ready for connection
- Suitable for TN-S and TT network systems
- Incl. thermal and dynamic cut-off unit
- With visual display of defects
- Version ...FS with remote signalling and potential-free NO contact for function monitoring
- High current conductivity and long service life
- Labelled connections

Application example: Residential buildings, single-family homes



Dimensions

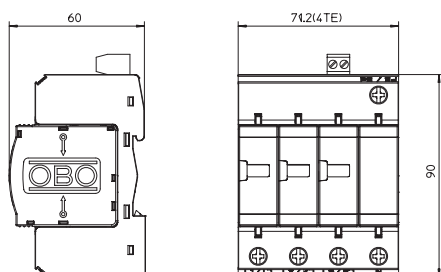

Master data


Item no.	5094931
Type	V10-C 3+NPE+FS
Description 1	SurgeController V10
Description 2	3+1 version with RS
Dimension	280V
Smallest sales unit (VG)	1 Piece
Weight	37,90 kg/100 pc.

Technical data sheet

Surge arrester V10 3-pole + NPE with remote signalling
280 V
Item no. 5094931



Technical data

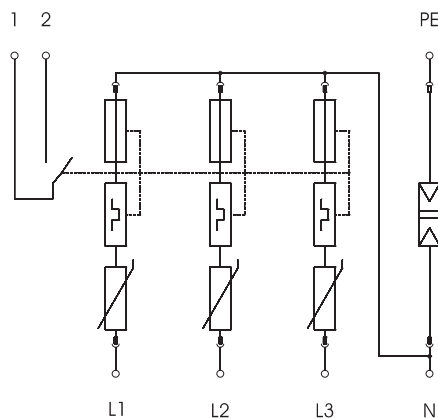

SPD to EN 61643-11	Type 2+3
SPD to IEC 61643-11	Class II+III
Test class, type 2	☒
Nominal voltage	230,00 V
Maximum continuous voltage AC	280,00 V
Max. continuous operating voltage	280,00 V
Nominal discharge current (8/20)	10 kA
Nominal discharge current (8/20 µs) [L-N]	10,00 kA
Nominal discharge current (8/20 µs) [N-PE]	30,00 kA
Maximum discharge current (8/20 µs)	20,00 kA
Arrester surge current (8/20) [total]	40,00 kA
Protection level	< 1,1 kV
Response time	<25 ns
Maximum back-up fuse	125,00 A
Temperature range	-40+80 °C
Pole version	3+N/PE
Version	3 + NPE
Mounting type	Hat rail 35 mm
Installation type	DIN rail 35 mm
Protection rating	IP20
Protection rating	IP 20
Blow-out	☐
Division unit TE (17.5 mm)	4
Remote signalling	☐
Telecommunications contact	☐
Connection cross-section, flexible	2,50 - 25,00 mm²
Connection cross-section, rigid	2,50 - 35,00 mm²
Connection cross-section, multi-wire	2,50 - 35,00 mm²
Signalling on device	Visual