


Technical data sheet

Connection clamp for earth rod, universal FT

Item number: 5001749

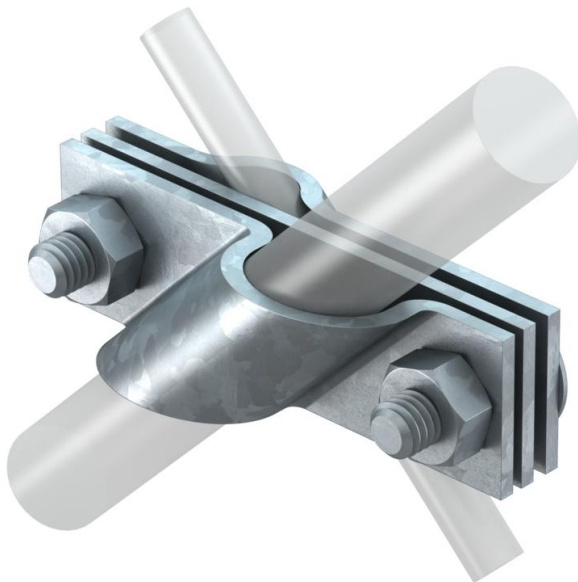

- Meets the requirements of VDE 0185-305-3 (IEC/ EN 62305-3)
- Suitable for connecting round conductors Rd 8-10 or flat conductors to FL 40
- With adapter plate
- Mounted with 2 hexagonal bolts M10 x 30 and 2 hexagonal bolts M10



St

Steel

FT

Hot-dip galvanised

Master data

Item number	5001749
Description 1	Connecting strap
Manufacturer	OBO
Dimension	20mm
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	20
Unit of quantity	Piece
Weight	32.4 kg
Weight unit	kg/100 pc.


Technical data sheet

Connection clamp for earth rod, universal FT


Item number: 5001749



Dimensions

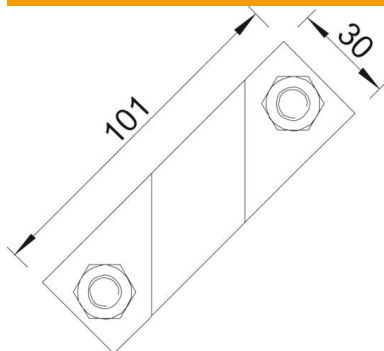

Dimension A 101 mm

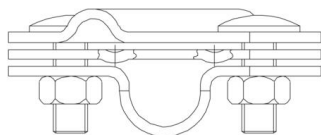

Technical data

Type	Connection clip
Earthing connection diameter for earth rods	20 mm
Suitable for round conductor diameters, max.	20 mm
Suitable for round conductor diameters, min.	10 mm
Short-circuit current (50 HZ)(1 s; $\leq 300^{\circ}\text{C}$)	8 mm
Fit	7.9 kA
Intermediate plate	Rd 8-10/FL40 mm
Clamping range, max.	yes
Clamping range, min.	10 mm
Suitable for flat conductor width min.	8 mm
Suitable for flat conductor width max.	10 mm