


Technical data sheet

Wide span cable tray WKSG 160 FT

Item number: 6098554

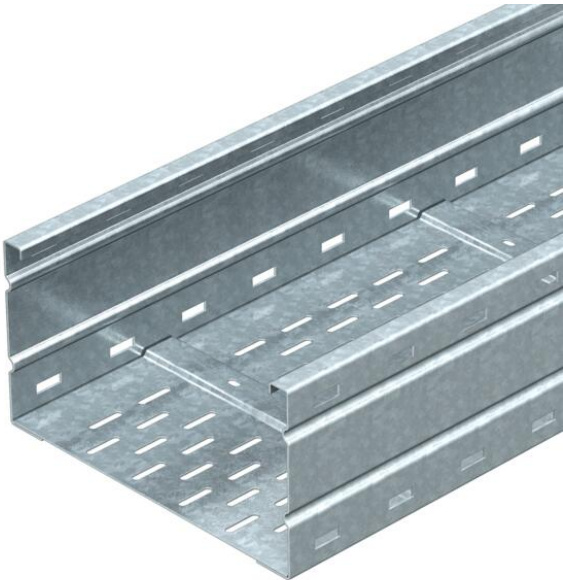

Wide span cable tray system, perforated, with a side height of 160 mm.  
Straight connectors of type WRV 160 should be ordered separately and in the appropriate quantity.  
Magnetic shield insulation without cover 20 dB, with cover 50 dB.



- St

Steel
- FT

Hot-dip galvanised

Master data		
Item number	6098554	
Description 1	Wide span cable tray	
Description 2	perforated, floor beaded	
Manufacturer	OBO	
Dimension	160x300x6000	
Colour	zinc	
Material	Steel	
Surface	Hot-dip galvanised	
Surface standard	DIN EN ISO 1461	
Smallest sales unit	6	
Unit of quantity	Metre	
Weight	1035.217 kg	
Weight unit	kg/100 m	
CO Footprint (GWP) Cradle-to-Gate	22,3704 kg COe / 1 Meter	


# Technical data sheet

## Wide span cable tray WKSG 160 FT

Item number: 6098554



### Dimensions

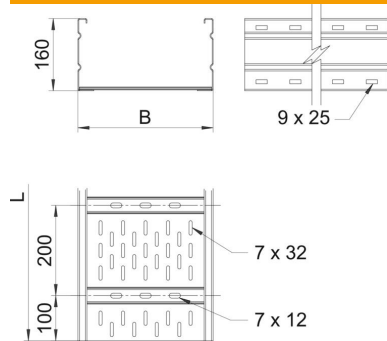

Dimension	300x6000
Length	6,000 mm
Width	300 mm
Height	160 mm
Plate thickness	2 mm
Dimension B	300 mm
Dimension L	6,000 mm

### Technical data

Connector version	Without connectors
Mounting system fastening type	Floor Ceiling Wall
Maintain electrical functions	no
Mounting perforation in base	yes
Usable cross-section	455 cm <sup>2</sup>
Usable cross-section	45500 mm <sup>2</sup>
Rustproof steel, pickled	no
Side perforation	yes
Wide-span version	yes
Magnetic shield insulation with cover	50 dB
Magnetic shield insulation without cover	20 dB
Usable length	6000 mm
Type of connector, cable support system	Screwed

# Technical data sheet


## Wide span cable tray WKSG 160 FT

Item number: 6098554



### Loads

Insertable support spacings, min.	3 m
Insertable support spacings, max.	8 m
Support spacing 3.0 m	2.9 kN/m
Support spacing 3.5 m	2.59 kN/m
Support spacing 4.0 m	2.3 kN/m
Support spacing 4.5 m	2.04 kN/m
Support spacing 5.0 m	1.8 kN/m
Support spacing 6.0 m	1.4 kN/m
Support spacing 7.0 m	1 kN/m
Support spacing 8.0 m	0.7 kN/m

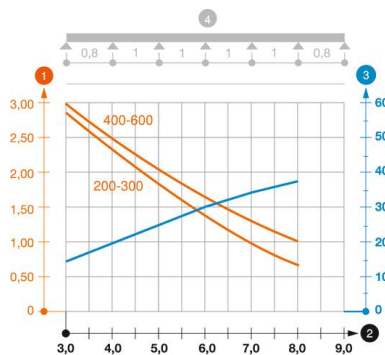

### Load diagram, wide span cable tray, type WKSG 160

- 1 Permitted cable tray/ladder load in kN/m without man load
- 2 Support width in m
- 3 Rail bend in mm at permitted kN/m
- 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width